

OPC UA supported data logging software DeviceXPlorer® Data Logger







Logging and monitoring data of production sites

Access to data of a wide variety of equipment


By using it together with the DeviceXPlorer® OPC Server and DeviceGateway®, it is possible to collect data of Multi-vendor equipment such as PLCs.

CSV CSV Database

3-step setup

Data can be easily collected and monitored in 3 steps (Server setting, Collect data setting, Logging setting).

DXPLOGGER

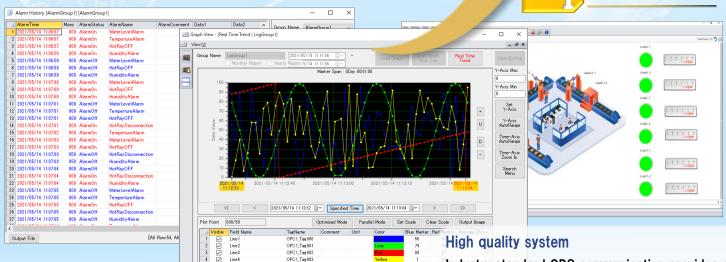



Machine tools

Industry standard OPC communication provides a flexible, reliable, and highly scalable system of data exchange.

Sensors



Robots


PLC

New functions in Ver.3


Simple monitor function NEW!! (Enterprise Only)

Items such as labels, lamps, and gauges can be placed on the screen to monitor equipment data in real time.

Maker Window

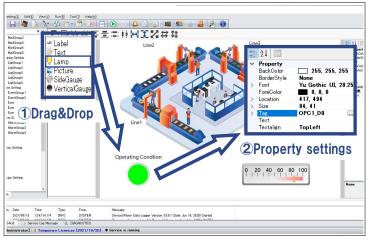

Viewer Window

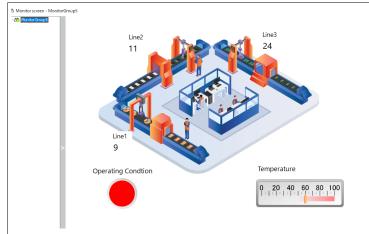

Easy item placement by dragging and dropping

Real-time monitoring




The graph function has been enhanced by adding operation graphs, pareto charts, pie charts, and stacked bar charts. These can be used to improve quality by identifying problems and understanding their causes.


Operation graph




Pareto chart

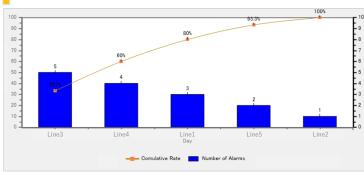

Laminated bar graph

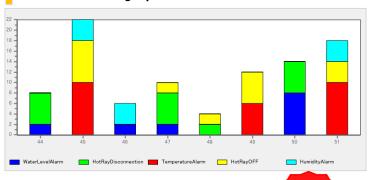

Pie chart

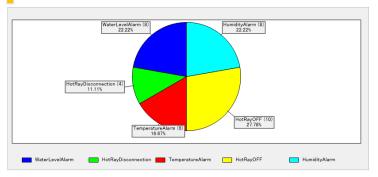

Service application support

Data collection runs in the background of the service application. Data can be collected without logging on to Windows.

NEW!!

Data logging

Supporting multiple databases

Logged data can be saved as a CSV file or in various databases such as SQL Server, Access, MySQL, Oracle and PostgreSQL through an ODBC driver.

You can select the INSERT or UPDATE commands when saving data.



Supporting Cloud databases

Data logging in PaaS type databases such as Windows Azure and Amazon Web Services supported, for easy collection and analysis of cloud-based systems.

Logging at optimal speed

Periodic Logging and Event Logging from PLC triggers are supported. It is possible to set the collecting period for each group separately, so that the network load can be taken into consideration.

Preventing loss of collected data

Even if the connection with the storage location is lost, collected data is buffered in a local disk.

Buffered data will be saved in the storage location when the connection is restored.


Data displaying


Spread sheet

By searching for a specific date, transition of collected data can be displayed in chronological order.

Necessary data can also be extracted by filtering the conditions of displayed data.

OPC UA supported de DeviceXPlorer

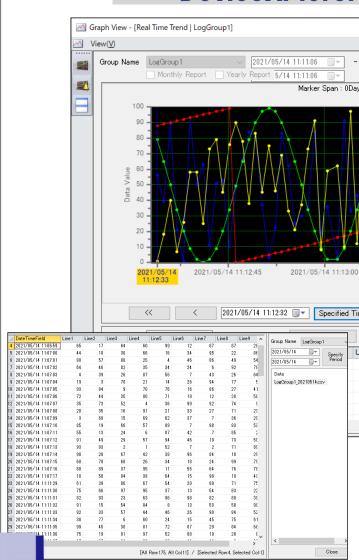



Displayed data can be output to CSV or EXCEL file format.

Actions

●Batch file/Fixed-cycle/FTP functions

You can set various actions, such as Batch file processing, which performs the execution function of the user program, Fixed-cycle writing processing for Heartbeats, and FTP function to transfer files.

Multilingual display

Supporting 3 languages

Display language can be changed between Japanese, English, and Chinese, so it can be used for overseas system projects.










ata logging software

[®] Data Logger






Reporting







Trend graphs

Historical trend graphs

Status transition can be displayed graphically.

You can specify the color of the target data, calculate average, minimum, and maximum values, expand the display range, and many other settings.

Real-time trend graphs

Collecting data is enabled to monitor trends in real time. It can display trends over any period.

Optimizing trend graphs

Equipped with an intuitively easy-to-understand graph display. By switching to a logarithmic graph, you can also check the vacuum degree and decibel value at a glance.

Alarm monitoring

Alarm displaying

Alarm conditions can be defined flexibly with a combination of threshold judgment, comparison conditions, and logical expressions. In addition to the current alarms, you can specify a date in the calendar and view a list of past alarms, along with their occurrences, recovery times, and data values.


●E-mail Notification

In the event of an alarm, you can be notified by e-mail, which helps to reduce downtime.

You can register multiple e-mail destinations to share the status of equipment in real time.



Recipe function



Send production instruction data with a click


Recipe data can be sent to production equipment all at once, in accordance with established trigger signals.

Separate production instructions are possible for each unique recipe.

Use Cases

Data logging

- Combine Device XPlorer® Data Logger with Device XPlorer® OPC server to store data in the database
- Combine with BI tools for increased Visualization/Analysis of equipment.

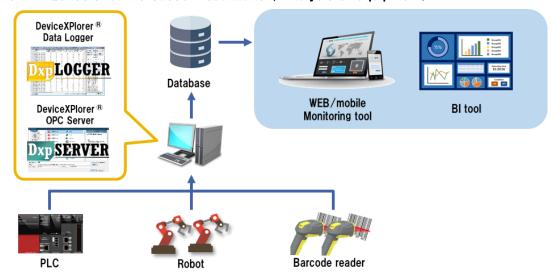


Facility monitoring

- Monitor equipment operating status in real time through monitor functions, graphs, and alarms
- Implement high security communication by connecting DeviceXPlorer[®] Data Logger and Device Gateway[®] with OPC UA



Alarm and Mail functions

- List abnormal conditions through alarm summary and alarm history
- Reduce downtime with e-mail notifications when an alarm occurs/recovers

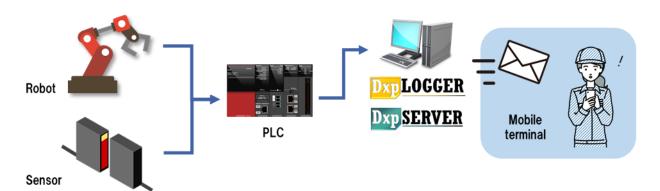

Specifications

Classification	Content		
OS *1	Windows10 (20H2) *1/Windows10 IoT Enterprise/Windows 10 Enterprise LTSC 2019/Windows8.1/Windows7 Windows Server2019/Windows Server2016/Windows Server2012 (R2) / Windows Server 2008 (R2)		
Framework	.NET Framework 4.7.2 or later		
Interface OPC DA 2.05A, OPC UA			

Classification	Content		
Data storage	CSV. ODBC driver compliant database (Microsoft SQL Server, Microsoft Access, Oracle Database, PostgreSQL, My SQL, Firebird etc.) Microsoft Azure SQL Database, Amazon RDS (Microsoft SQL Server, Oracle, PostgreSQL, MySQL)		
Application Type *2	32bit Application (Win32/x86), 64bit Application (Win64/x64)		

- *1 In Home Edition, Windows Update type is fixed at "Current Branch," where updates are performed automatically. As this may cause issues with the OS, Pro Edition or above is recommended.

 *2 You can select 32bit or 64bit application installation. Please refer to the manual for details.

Features

Classification	Item	Content		
	Authority	Permission settings configuration		
Standard functionality	Diagnostic	Execution status diagnostic, Log message output		
Tunctionality	Connectivity	Supports 128 OPC servers		
	Others	Auto logging, Running in task tray, Wizard setting		
	Logging	Periodic, event		
	Interval	50ms - 24hours		
	Limitation points	65,536 (512 points x 128 groups)		
	Туре	Binary, BCD, Float, Logarithm, String		
Data Logging	File format	CSV, ODBC (INSERT, UPDATE)		
Logging	Primary function	Logging for (periodic, the hour, trigger, event, relative time) handshake, split file, offline buffering, write cache, retention period, aggregation		
	Calculation	Engineering, BCD, multiple rate, square root extraction, power factor, Amount of change, logarithm, string table, dead band		
Report		Daily/Monthly/Yearly (Automatic printing, XLS(X), PDF)		
	Туре	Spread sheet		
Data View	Display unit	By group, date		
	Filter	Select Value, Specific range		
	Condition	Alarm occurs/recovers		
Mail	Number of settings	16 groups (1 group x 16 addresses)		

^{*1} Up to 64 graphs can be displayed simultaneously in a 64bit application, and up to 16 graphs can be displayed in a 32bit application.

Classification	Item	Content		
Recipe	Processing	128 groups (Max 30,000 tags, 1,000 recipes)		
	Display type	Real-time, historical		
	Number of graph	64 graphs*1		
	Number of line	512 lines (10 million points)		
Trend graph	Туре	XY plot, step chart, bar graph, area chart, semi-logarithmic graph, operation graph, pie chart, stacked bar, pareto chart		
	Primary function	Optimize, Data search, Scooter bar		
	Unit	Each group on date, File designation		
	Export	Printing, Various export file formats (Image, CSV, XLS)		
	Monitoring interval	50ms - 24hours		
	Monitoring points	128K points (1,024 points x 128 groups)		
Alarm	Туре	Alarm summary, Alarm history		
	Condition	Value range, Comparison of data		
	Contents	Alarm occurrence /restoration (date and time), Data values, Comment, Alarm level, Audio playback		
	Execution process	Execution program, Write value, FTP		
Action	Number of process	128 groups (1 program and 10 values writing)		
	Type of write value	Heartbeat signal, Increment, Decrement, Fixed value, Date and time		
Simple Monitor*2	Processing	16 groups (1 group * 128 points)		

Product Type	Activation Flow			
Package (Hardware Key)	Insert a Hardware Key and use. DXP LOGGER USB-Key			
Package (Software Key) or Download	Perform user registration and get an ID. User registration User	Activate using online PC, and use. * Only necessary during initial installation * Only necessary during initial installation		

^{*2} Only available in the Enterprise Edition. **License Activation Flow**



How to read the model code

DXPLOGV3 A-B-C-D

A	Edition	EP:Enterprise ST:Standard		
В	Product Type	HW:Package (Hardware Key) SW:Package (Software Key) DL:Download		
C	Upgrade	Unspecified:Normal product V:Version upgrade CH:Enhanced upgrade		
D	Langage	Unspecified: Japanese E: English		

Lineup

Enterprise Edition

Product Name	Product form	Model	Remarks	
	Package (Hardware Key)	DXPLOGV3EP-HW-E		
DxpLOGGER V3 Enterprise	Package (Software Key)	DXPLOGV3EP-SW-E	Simple monitor function available	
	Download	DXPLOGV3EP-DL-E		
	Package (Hardware Key)	DXPLOGV3EP-HW-V-E	Upgrade to the latest version	
DxpLOGGER V3 Enterprise Version Upgrade *1	Package (Software Key)	DXPLOGV3EP-SW-V-E		
	Download	DXPLOGV3EP-DL-V-E		
	Package (Hardware Key)	DXPLOGV3EP-HW-CH-E		
DxpLOGGER V3 Enterprise Enhanced upgrade	Package (Software Key)	DXPLOGV3EP-SW-CH-E	Upgrade to Enterprise Edition from Standard Edition.	
	Download	DXPLOGV3EP-DL-CH-E		

Standard Edition

Product Name	Product form	Model	Remarks
	Package (Hardware Key)	DXPLOGV3ST-HW-E	
DxpLOGGER V3 Standard	Package (Software Key)	DXPLOGV3ST-SW-E	Simple monitor function not available
	Download	DXPLOGV3ST-DL-E	
D 1000FD V0 01 1 1	Package (Hardware Key)	DXPLOGV3ST-HW-V-E	
DxpLOGGER V3 Standard Version Upgrade *1	Package (Software Key)	DXPLOGV3ST-SW-V-E	Upgrade to the latest version
Version opgrade	Download	DXPLOGV3ST-DL-V-E	

At the time of minor version upgrade, each product can be upgraded free of charge by applying a patch. However, if you have purchased the package version, you can upgrade free of charge only once within 18 months after purchase. Please purchase the upgraded product each time after 18 months or more. Minor upgrades are for upgrades after the decimal point, such as Ver3.0 to Ver3.1.

Major upgrades, such as Ver2.x to Ver3.x. In this case, please purchase an upgraded version.

Related Products



DeviceXPlorer® OPC Server **Industrial Communication Platform**



DeviceGateway® Data Access Unit for IoT





TAKEBISHI

TAKEBISHI CORPORATION

29, Mamedacho, Nishikyogoku, Ukyo-Ku, Kyoto, 615-8501, Japan

Support Desk

+81-75-325-2261 Available: Weekday:9:00-17:00 (Japan local time)

HP: https://www.faweb.net/en/

YouTube: https://www.youtube.com/@faweb_en

